

Sealmaster Door Frame Guards

Part of the Dixon
International Group Ltd
www.dig.co.uk

Introduction

In many high traffic areas of a building, door sets more than any other structural element are subjected to unacceptable levels of punishing treatment.

Description

Sealmaster door frame guards, available in both rotary and rigid guard versions are designed to counteract wear and tear on door frames and exposed wall corners by deflecting objects and traffic away from the vulnerable areas.



Application & Performance

Sealmaster rotary door frame guards have been impact tested to 500kg at 2mph. The rigid version design allows variable fitting locations to allow most door frame sections to be accommodated. Both versions are simple to fit and virtually maintenance free.

Their design helps to avoid the need for repetitive maintenance and replacement of frames and door lippings. The rotary frame guard is supplied in 600mm lengths as standard with either a 25mm or 50mm diameter rotating drum.

www.sealmaster.co.uk



Sealmaster Door Frame Guards

Part of the Dixon
International Group Ltd
www.dig.co.uk

Rotary Door Frame Guard



The rotating drum protects the door frame and deflects objects away from the vulnerable edge of the door.

Height (see table) Leg
size 50mm / 25mm

Order Code	Leg Size	Length
DFG/B/25/600	25mm	600mm
DFG/B/25/800	25mm	800mm
DFG/B/50/600	50mm	600mm
DFG/B/50/800	50mm	800mm

Availability

Standard finish natural anodised aluminium. Optional extras:
coloured PVC centre panel with
matching or variable aluminium
color finishes.

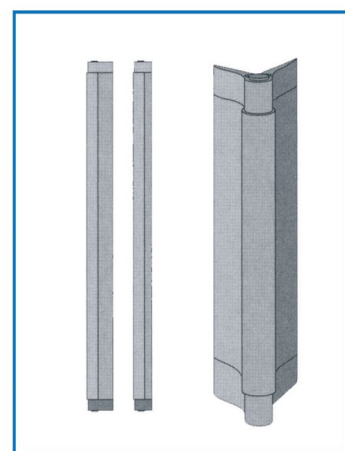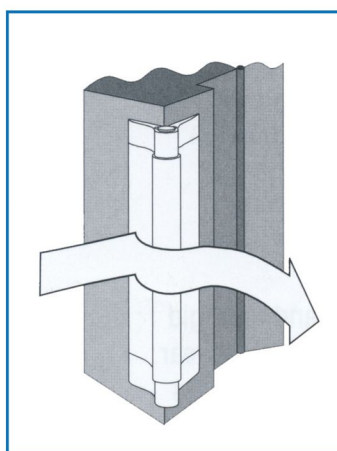

Rigid Door Frame Guard

The Rigid Frame Guard deflects objects away from the vulnerable rear edge of the door.

Choice of: 2500mm
or specified cut size,

Order Code	Length
DFG/A/FULL DFG/A/CUT	2.5mm Cut to size - cost proportionate to number of lengths extracted from 2.5m

